Type: DA75-NPxx/AxxW

BCD/hex/24V active high

front view DA75-NP50/AxxWD

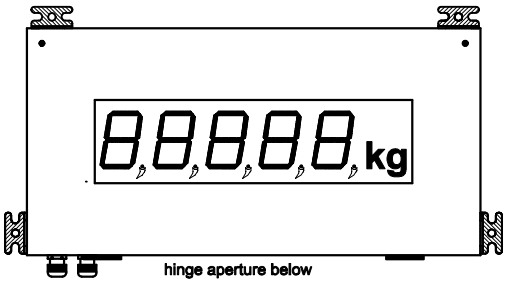

side view



controls inside case

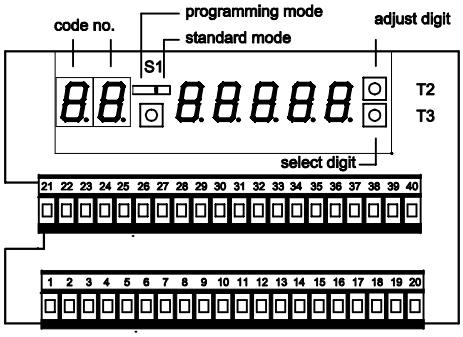

programming instructions

(select digit with key T3, adjust digit with key T2)

code no. 00	display 00000 parallel ___1x	display 00000 multiplex ___0x	input code	data inputs A B C D
BCD	___11	___01	display	0 1 2 3 4 5 6 7 8 9
	___12	___02	display 1.digit	0 1 2 3 4 5 6 7 8 9 -
Hex	___13	___03	display	0 1 2 3 4 5 6 7 8 9 A b C d E F
	___14	___04	display 1.digit	0 1 2 3 4 5 6 7 8 9 A b C d E F -

screw-type terminals

DA75-NPxx/A1



DC
aux. supply
electr. isolated

DA75-NPxx/A2

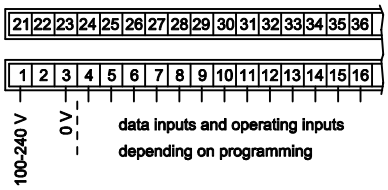

AC/DC
aux. supply
electr. isolated

terminal inputs

(KZ = code no.)

KZ	display	terminal																																						
00	___00	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
BCD	multiplex 01 02	aux. supply			Gnd	ST	A	B	C	D	DT	LE	DP	DT	LE	DP	DT	LE	DP	DT	LE	DP	DT	LE	DP																
Hex	multiplex 03 04				BCD						10^0			10^1			10^2			10^3			10^4																		
BCD	parallel 11 12	aux. supply			Gnd	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP	A	B	C	D	DT	LE	DP		
Hex	parallel 13 14				BCD 10^0								BCD 10^1							BCD 10^2							BCD 10^3							BCD 10^4						

operating inputs: active high (independent form BCD-inputs)

ST	lamp-test:	all segments and decimal points displayed
DT	blanking input:	display blank
DP	decimal point:	decimal point displayed
LE	Latch Enable:	latch enable
	after a change of the LE-signal from L to H the display stores	
	the information received before the LE-signal changed.	

operating inputs	(X = H or L)		
DT	H	L	X
LE	X	H	X
ST	L	L	H
data	X	X	X
display	blank	latch	test

technical data:

aux. supply:	DA75-NPxx/A1... DA75-NPxx/A2...	18 - 35 V DC 100 - 240 V AC/DC
power consumption:	max. 15VA	
temperature range:	-20 °C . . . +65 °C	
data / operating inputs:	24V active high	
	max. 35V L < 7V, H > 10V min. 2ms	
input resistance:	15 kOhm	
display height/colour:	LED 76 mm / red or green	

case dimensions

DA75	Sheet steel powder coated RAL 7032		outside dimension (mm) width	x height	x depth
DA75-NP __ /xxxxW	DA75-NP __ /xxxxW D	DA75-NP __ /xxxxW D1			
30 888			400	300	130
40 8888	30 888 °C				
50 88888	40 8888 °C	30 888 km/h	500		
	50 88888 °C	40 8888 km/h	600		
		50 88888 km/h			

DA75 – NP__ / _ _ _ W __

dimension:	D = max. 2 signs	D1 = max. 4 signs	
LED colour:	R = Red	G = Green	
aux.supply:	1 = 24V DC	2 = 230V AC	
BCD-input:	A = active high 24V		
digits:	30 = 3 digits	40 = 4 digits	50 = 5 digits

GS Gebhardt & Schäfer Industrie-Elektronik GmbH

Moltkestraße 44a, D-42799 Leichlingen
Postfach 15 52, D-42786 Leichlingen
Tel. +49 (0) 21 75 / 89 91 30
Fax +49 (0) 21 75 / 89 91 39
Internet: http://www.GS-GmbH.de
E-Mail: info@GS-GmbH.de

Deutsche Bank 24
Konto-Nr. 851 085 100
BLZ 375 700 24
Kreissparkasse Köln
Konto-Nr. 031 200 61 45
BLZ 370 502 99

Foreign Payments:
Deutsche Bank 24
Account-No. 851 085 1
Bank Code 375 700 24
IBAN DE 81375700240008510851
S.W.I.F.T. DEUTDEDK 375

Geschäftsführer:
Karlheinz Schäfer
Guido Gebhardt
USt.-Nr. DE 123713297
Amtsgericht Köln
HRB 48860